

K30
GLASS



K30 SF

FLUSH GLAZED FOLDING WALLS



Ironmongery



Glass



Blinds



Doors




Installers



Design

The development of the K30 SF folding wall acknowledges architectural challenges and has created new options for space division.



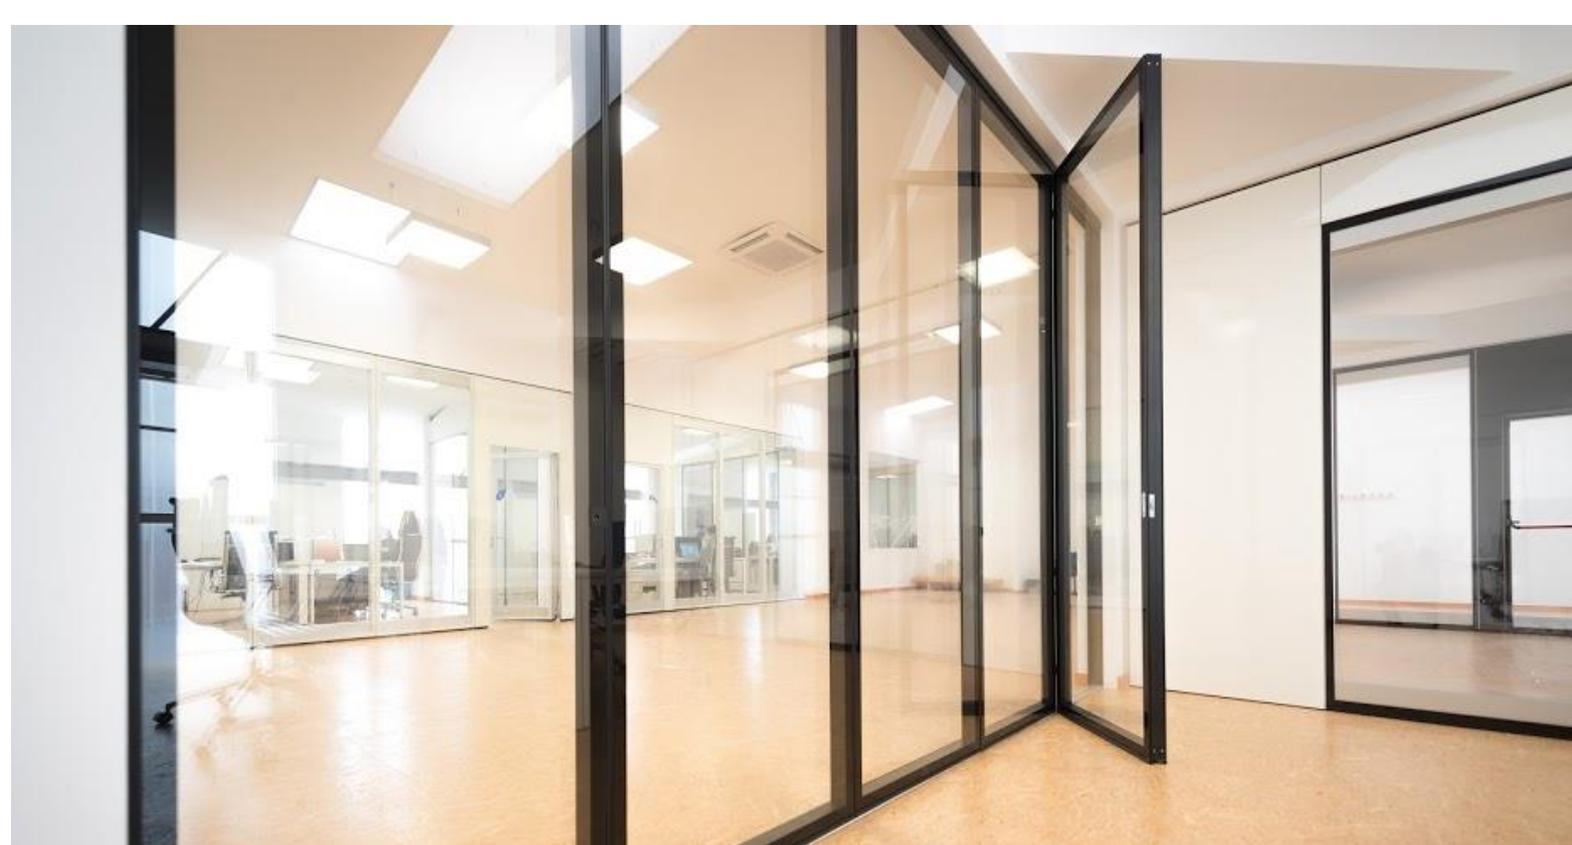


K30 SF

Our team have created a highly aesthetic system with concealed hinges and a discreet aluminium frame. Available in a wide range of surface finishes and panel configurations. The K30 SF wall is a quick, easy to operate solution that achieves good levels of acoustic performance.



TECHNICAL DATA

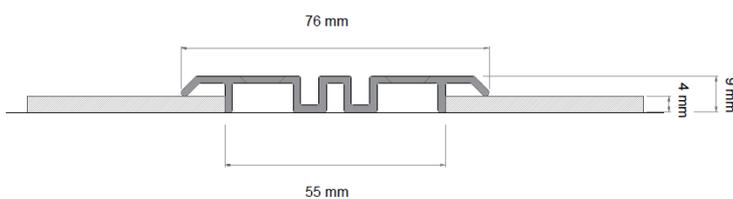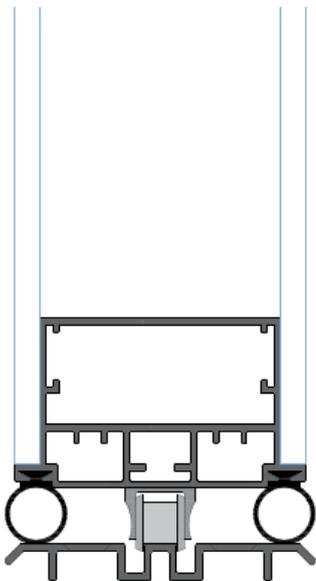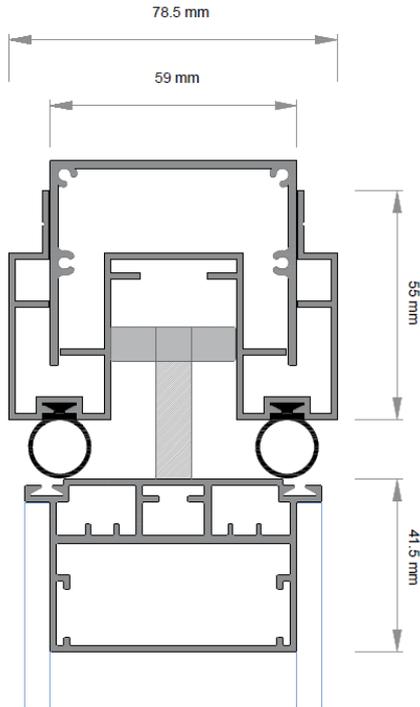

DIMENSIONS

THICKNESS IN MM – 70 mm

CONSTRUCTION

FINISHES – MFC | HPL | MDF | GLAZED
ELEMENT CONNECTIONS– ALUMINIUM PROFILES

OPERATION

MANUAL

Accoustic Rating dB (RW)	42 - 43
Thickness (mm)	70
Weight kg / m ²	25 - 42
Max Panel Height (mm)	4000
Max Panel Width (mm)	450 - 950
Panel Construction / Frame	Aluminium
Max Opening Width mm	Adjustable



Telescopic Head Rail

The K30 SF wall has 2 aluminium ceiling rails to accommodate manual adjustment, allowing us to overcome uneven ceilings.



Floor-mounted rail

The ability to be floor-mounted provides a solution when overhead structural support is unavailable. The aluminium rail is securely screw fixed dead level across the opening and the shallow depth fits neatly within the floor finish.



Concealed Hinges

The concealed hinges have allowed us to create a completely flush Wall with zero projections. We worked to create a highly aesthetic finish whilst producing an architecturally pleasing product for today's demanding spaces.



Opaque / Glazed

Our walls are available in a wide range of surface finish options and panel configurations to integrate with different environments.